

【Criteria ver.1】※ This criteria should be appropriately updated in response to changes in circumstances, such as the evaluation of the sustainability of composite fibers and the innovation of manufacturing technologies and facilities and so on.

Phase	Allotment	Sec.	Evaluation and scoring calculation	Speciation	Coefficient	Evaluation Comment	Sustainable points (reasons)				
Design (55)	25	Triacetate (Soalon)	25p X composition ratio(%) X 1		1	Making triacetate(Cellulosic certification yarn) a criterion of coefficient ,as a sustainable fiber	Reference: coefficient at the past evaluation (uncertified 0.5 → Biomass Certified 0.6 → FSC-COC 0.8 → Bluesign Approved 1)				
		Mixed yarn	25p X coefficient X composition ratio(%)	Plant fiber (cotton and linen etc.)	0.5	Inferior water resource efficiency in water risk areas	Each coefficient is set considering the degree of environmental burden, the content and extent of risk collateral with the certification system. (compared it and balanced with triacetate ,such as environment- friendly certified fibers, natural fibers, regenerated fibers, etc.) cf Annex fig-1 Conjugated fibers are judged according to composition. Use of biological proteins such as spider silk, euclena, etc. also categorized as bio. *a: Superior in terms of CO2 emissions not including carbon. Although it is easy to recycle, it is difficult to divide from textile (other materials are used as CO2 emission sources in the combustion method and are meaningless in the general composition ratio) and, conversely, its discomfort is a demerit and it is difficult to achieve durability as a clothing textile. ⇒ Inferior to LCA Inventory Assessment Product Life. Meanwhile, extremely low mixing rate may be assumed in the composite scene, so aside from the evaluation of the material itself, as a composite yarn it is evaluated as inferior compared to other yarns.				
				Ditto, certified type	0.9						
				Animal fiber (animal hair)	0.4	GHG impacts and risk of the food crisis by livestock					
				Ditto, certified type	0.7						
				Silk, etc.	0.9						
				Ditto, certified type	1						
				Regenerated fiber	0.5	Chemical substances in manufacturing					
				Ditto, certified type	1						
				Synthetic fiber	0.4	There is a conformity rule regarding recycling composition ratio, etc 100% bio becomes coefficient 1.					
Ditto, Recycled yarn	0.6										
Ditto, Certified recycled yarn	0.8										
Bio-derived synthetic fiber (0.4x bio-degree%)	0.6+										
Metallic fiber , inorganic fiber	0.2	In terms of CO2 emissions, it is dominant, but*a									
6	Number of fiber type in a textile 6p X coefficient	One type (100%)	1	Evaluation of Contamination impact in end-of-life situations such as disposal, recycling, etc.(There is scope to assume Br/Dull classification in future) and difficulty of separation.							
		Two types (TA100)	1								
4	Interchangeability of the warp and the weft	No 0p Yes(and knitted) 4p		Whether wp yarns can be used wf yarns (loss management)							
20	Content of constituent yarns	20p X coefficient by twisting type Xcoefficient of Twist constant ÷ number of yarn types ※ Multiple yarn type:calculate individually each yarn and sum up later Textile:wp 12 points wf 8 points (reference) ※ The actual allocation of points is based on the actual design. Distribute 20 points by wp/wf weight ratio. Knitting: 20 points	Coefficient by twisting type	Twist constant — coefficient	⚠ The coefficient of twist constant is adopted by calculation based on the total combined yarn fineness.	Consideration of yarn loss management, consumption of electrical energy and heat sources for mechanical operation.					
			Simple twist/Plied yarn	1			Less than 90	1			
			Multi-process, special twist yarn	0.5			90 to less than 150	0.5			
			Slab, etc. fancy twist yarn				150 to less than 200	0.3			
			Composite process yarns, composed of two or more types of yarn (including false-twist )	0.2			200~	0.1			
			Single yarn false-twist	0.6							
			Film yarn, metal yarn, etc.	0							
4	With or without sizing	With 0p Without (and knitted) 4p	Coefficient values for each classification		Process · glue · energy (for sizingmachine/beam delivery etc) There can be no 0 beam of woven. As it is a minimum of 1 beam and standard, the minus points method is adopted. In addition, taking into account the gap between the evaluation of the knitted fabric, the MAX point of the woven is set to 0 points and 1 point of knit.						
			1B	0p							
			2B	-2p							
			3B or more (knitted) Tricot	-5p							
			(knitted) Circular	+1p							
			Within 0-5%	1							
5	Weaving loss Knitting loss	※ Loss factor : all losses with design value 5p X coefficient	5 ↑ to less than 10%	0.6	Strictly, only weaving loss( knitting loss) is enough. (separately,there is evaluation of constituent yarn twists), but duplication is negligible. Evaluated by total loss based on the simplicity of calculation. Large loss rate ⇒ Multiple processes are also supposed.						
			10% or more	0							
5	Rotational speed/Pick (wf density / gauge)	weft density of greige 5p X coefficient ※ For knitted fabrics, gauges are conveniently substituted.	90/inch or less	1	Knitt) ~26G 28G 32G~ Production Efficiency: The production efficiency is regarded as the equivalent proportion of energy consumption. Model efficiency and electrical energy are neglected.						
			more than 90/inch ~ less than 110/inch	0.6							
5	Warping length	length of greige ÷ finish length (with design value) 5p X coefficient	110/inch or more	0	Ditto						
			~ Less than 1.2	1							
5	1.2~ Less than 1.5	1.5~		0.6							
				0							
5	Input lot	Bath ratio	Set coefficient based on the bath ratio in each division according to greige weight range coefficients are set positive and negative. 5p X coefficient	piece/B	<12 kg/piece	12 ≤ a ≤ 23 kg/piece	23 < kg/piece	Water resource efficiency perspective (converted to the number of dyeing batches due to poor visibility and difficulty for customers using bath ratio values) piece/batch			
				12 ≤	1.0	1.0	1.0				
				10	0.0	1.0	1.0				
				6~8	-0.5	0.0	1.0				
				≤4	-1.0	-0.5	0.0				
				5	Number of wet processes	5p X coefficient	Once (HE-dyed)		1	Evaluate the amount of processes by the number of times using dyeing pot.	
							2 times (HE-RX-dyed)		0		
							3 times (HE-RX-dyeing-AF)		-0.4		
				5	Processing technique	Special post-processes , incidental processes (Per 1 incidental processing)	Water-free dyeing		Add points	+5p	Water Resource Efficiency Perspective Evaluated with the certification. * The standard is set to ±0 by considering the addition point in the certification. Increase in dyestuffs and auxiliaries and deterioration in water efficiency Evaluation of additional chemical agents. Wrinkling as AF, LRM, SNR, etc. are excluded (evaluated by the number of steps in the dyeing pot). Point addition item (Including sakai ovex-inclusive certification by oeko-tex)
							Disperse (cationic) dyeing		Standard	0p	
Double bath dyeing	Deduct points	-5p									
One bath two-stage	Deduct points	-5p									
Certified for dye staffs , chemical agents, etc.	Add points	+5p									
5	Or organic origin, etc.	Add points									
Other (5)	5	Evaluation of the additive elements that do not fit into the above-mentioned endpoints but should be taken into account.	Add points	0 ⇔ +5p							

fig-1:[coefficient setting chart]

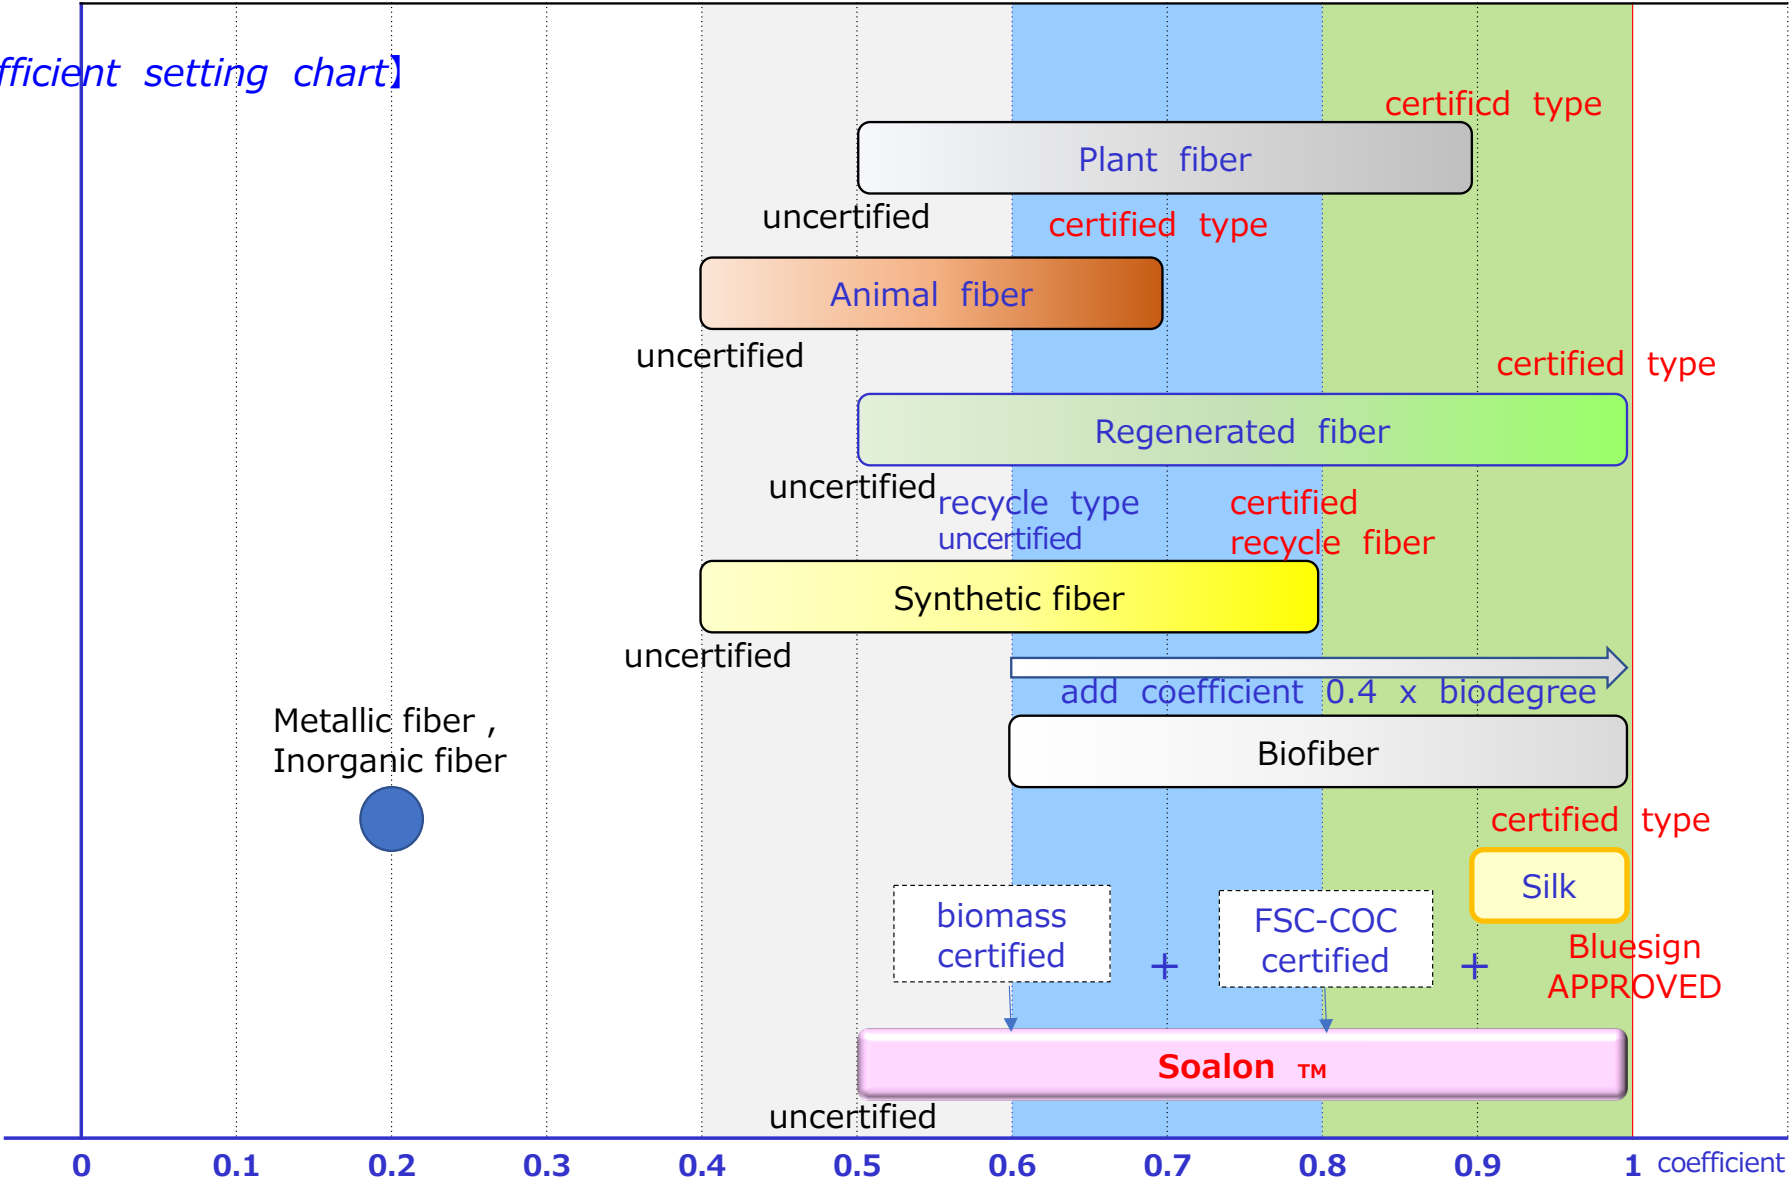


fig-2:[Evaluation weight]

